

Transient Analysis of the Single-Conductor Overhead Lines Connected to Grid-Grounded Arrester under Direct Lightning by Means of GA

F. Taheri, S.R. Ostadzadeh

Faculty of Eng, Arak University, Arak, Iran

Corresponding author: s-ostadzadeh@araku.ac.ir

Abstract- In this paper, genetic algorithm-based approach for transient analysis of single transmission line connected to arrester is proposed. In this approach, the lightning channel striking the overhead line is first represented by a current source and this source is truncated by a finite set of frequency harmonics in time domain. Norton equivalent circuit viewed across arrester is then computed by method of Fuzzy (MoF), then applying Kirchhoff's current law to this nonlinear circuit and solving it by genetic algorithm, transient voltage across the arrester is easily computed. Comparison of the achieved voltage with accurate one (EMTP software) shows good agreement as well as fast run-time.

Index Terms- Arrester, overhead line, genetic algorithm.

I. INTRODUCTION

Surge arresters are used along transmission lines to protect power systems against over voltages created by different strikes such as switching, lightning and so on. Suppressing performance of arresters is dependent upon the exact analysis of them, and this accordingly is strictly dependent on exact analyses of the different systems connected to arresters for instance overhead lines and grounding systems. Figure 1 shows two sub-systems connected to arrester, i.e., overhead line and grounding system. Figure 2(a) is frequency-domain representation of the figure 1 in which the overhead line is substituted by a transmission line of length L and characteristic impedance Z_c , and the grounding system is also by linear impedance Z_g . There are different methods for analysis of these two sub- systems such as transmission line model (TLM) [1-7] but most of them are based on quasi static assumptions and thus invalid at high-frequency currents induced along lines.

With reference to [8], evaluation of the overvoltage is carried out through analyzing Norton equivalent viewed across arrester as shown in figure 2(b) by arithmetic operator method (AOM), but the overhead line and the grounding system are analyzed by transmission line model (TLM) [1] and distributed RLC model [2-7] respectively. Therefore the overvoltage is not exactly computed.

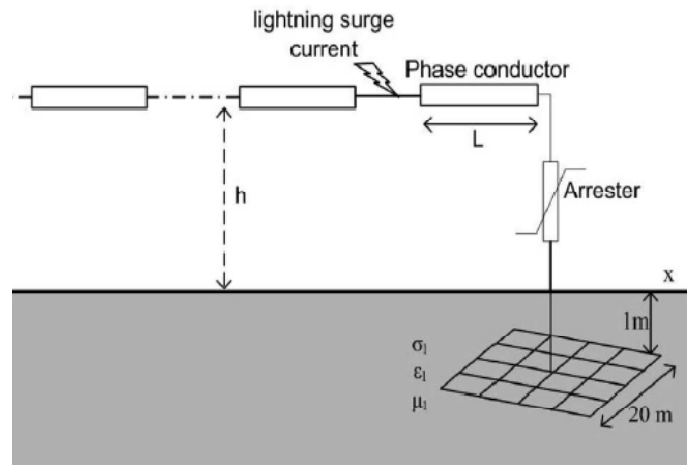


Fig. 1 Overhead line connected to grounded arrester and subjected by direct lightning strike in which grounding system is represented by grid grounding [8].

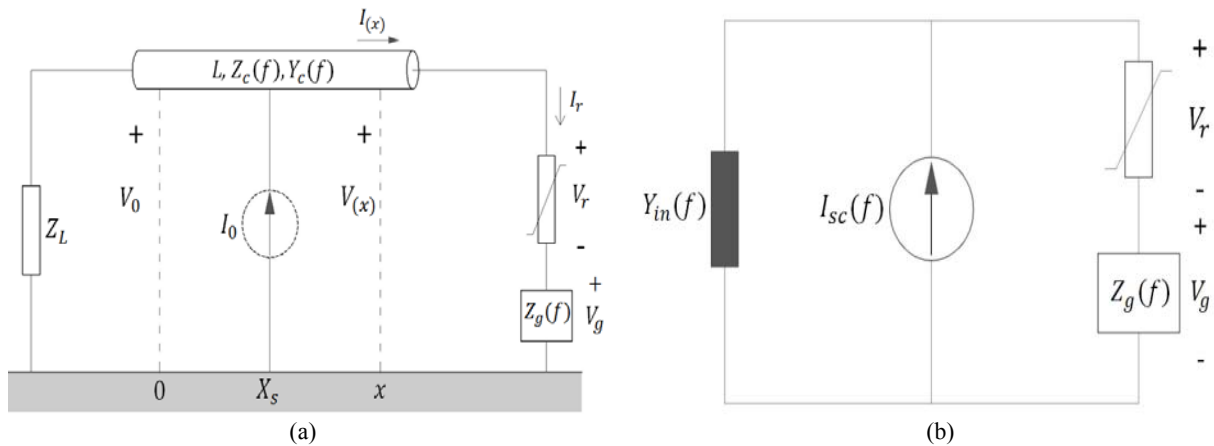


Fig. 2. (a): Frequency-domain representation of figure 1 in which the overhead line and grounding system are represented by transmission line and linear impedance respectively and surge current by current source $I_0(t)$, (b): Norton equivalent circuit viewed across arrester.

In our previous studies [9, 10], frequency-domain models based on fuzzy inference were proposed for high-frequency analyses of transmission lines and grounding systems, but efficiently nonlinear analysis of the overvoltage was not performed. Conventional electromagnetic transient programs such as EMTP software [11] deal with such nonlinear problems but these solvers substitute transmission lines and grounding systems by time-domain representation. In fact frequency response of each subsystem must be first computed through numerical methods such as method of moments (MoM) [12] and then by vector fitting [13] frequency response is then converted to time domain one and finally imported into EMTP. In contrast with EMTP, the AOM needs to frequency response only, but it suffers from suitable initial guess as well as gradient operation and matrix inversion in the iteration process.

Table I. Parameters related to the nine sinusoidal harmonies.

ω_i (Mrad / sec)	$\omega_1 = 0.11$	$\omega_2 = 0.21$	$\omega_3 = 0.42$	$\omega_4 = 0.63$	$\omega_5 = 0.65$	$\omega_6 = 1.16$	$\omega_7 = 1.26$	$\omega_8 = 1.45$	$\omega_9 = 1.66$
I_i (A)	4.67e4	2.05e4	3815	9667	8522	151	185.5	102	62.5
ϕ_i (rad)	-0.42	0.93	0.43	0.065	3	-2.26	-0.76	-0.57	-0.89

In this contribution, an approach based on genetic algorithm (GA) is proposed. Genetic algorithm has wide spread applications such as in electromagnetic engineering as optimization tool [14-16], but it is here used for analysis of the desired problem. In analyzing with GA, the drawbacks of the AOM are completely removed. Also in despite of the EMTP, for evaluating lightning-induced over voltage, frequency response is only needed, also there is no need to fast Fourier transform (FFT) and inverse fast Fourier transform (IFFT). As a result, transient voltage is efficiently computed by the GA.

This paper is organized as follows. In section II, modeling formulation using the GA is given. In section III, the proposed approach is applied to an overhead line connected to grounded arrester is considered. Finally conclusion is in section VI.

II. MODELING FORMULATION USING GENETIC ALGORITHM

As shown in figure 3, lightning-induced current along overhead line is represented by a current pulse $I_0(t)$ which is expressed as following:

$$i_0(t) = I_m (e^{-\alpha t} - e^{-\beta t}) \quad (1)$$

Where $I_m = 40KA$, $\alpha = 2(1/ms)$ and $\beta = 400(1/ms)$. At the first of modeling using GA, this current is expressed by a finite number of discrete spectra, i.e., sinusoidal harmonies. Figure 3 shows curve fitting this current by nine harmonies. As it is seen in the figure 3, excellent fitting is achieved. The approximated current is of the following expansion:

$$i_0(t) \approx \sum_{i=1}^9 \{ I_i \sin(\omega_i t + \phi_i) \} \quad (2)$$

Where the above parameters are listed in table 1.

To evaluate the lightning-induced voltage, the Norton equivalent circuit in the figure 2(b) is then redrawn as shown in figure 4.

In figure 4, I'_{sc} and Y'_{in} are frequency-domain quantities and computed as following:

$$I'_{sc} = \frac{I_{sc}}{1 + Z_g Y_{in}} \quad (3)$$

$$Y'_{in} = \frac{Y_{in}}{1 + Z_g Y_{in}} \quad (4)$$

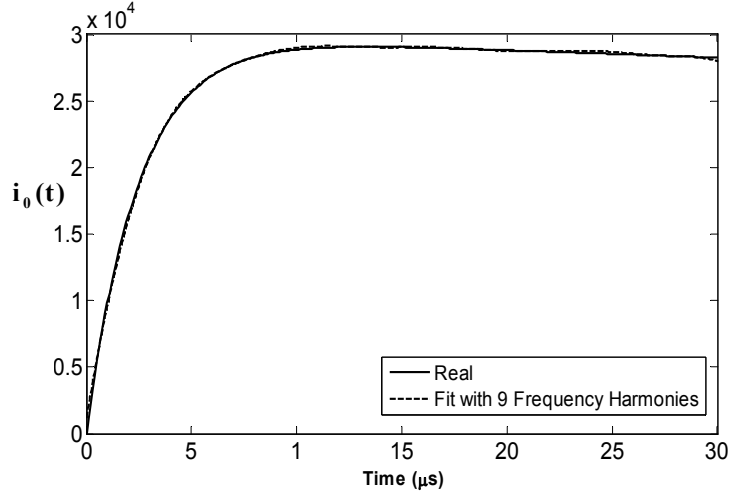


Fig. 3. Approximating the current source $I_0(t)$ by nine frequency harmonies.

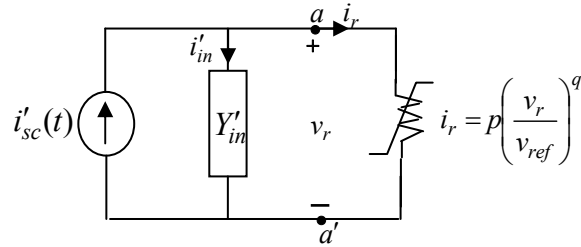


Fig 4. Simplified equivalent circuit of the figure 3.

In the above equations, I_{sc} , Y_{in} , and Z_g were efficiently computed by MoF in [9] and [16] respectively.

According to the (3) and (4) and the figure 2, the amplitude and phase of I_{sc} and I'_{sc} are easily related to individual ones of I_0 in the frequency domain, and therefore computing $i'_{sc}(t)$ in time domain is straightforward.

Now applying KCL to the node (a) in the figure 4 yields:

$$KCL(a) \Rightarrow i'_{sc} - i'_{in} - i_r = 0 \quad (5)$$

where

$$i'_{sc}(t) = \sum_{i=1}^M I_{sc,i} \sin(\omega_i t + \phi_{sc,i}) \quad (6)$$

In the equation (6), M is the number of sinusoidal harmonies for fitting the surge current pulse, i.e., 9. It is obvious that in the figure 4, due to nonlinearity of the arrester, the number of frequency harmonies created across the arrester is linear combination of exciting frequency harmonies [17], that is:

$$\omega_j = k_1 \omega_1 + k_2 \omega_2 + \dots + k_M \omega_M, \quad j = 1, 2, \dots, N \quad (7)$$

Where integers $k_i, i=1,2,\dots,M$ are chosen in such a way that $|k_i| < q$. Hence the following expression for the voltage is considered:

$$v(t) = V_0 + \sum_{j=1}^N V_j \sin(\omega_j t + \phi_j) \tag{8}$$

Where N is the number of created sinusoidal harmonics across arrester and the corresponding arrester current is expressed as following:

$$i_r = p \left(\frac{V_0 + \sum_{j=1}^N V_j \cos(\omega_j t + \phi_j)}{v_{ref}} \right)^q \tag{9}$$

Since in the figure 4, Y_{in}' and the arrester are in parallel, the current flowing to Y_{in}' is of the following form:

$$i_{in}'(t) = \sum_{j=1}^N G'(\omega_j) V_j \cos(\omega_j t + \phi_j) - \sum_{j=1}^N B'(\omega_j) V_j \sin(\omega_j t + \phi_j) \tag{10}$$

Substituting (6), (9) and (10) in (5) yields:

$$\sum_{i=1}^M I_{sc,i} \cos(\omega_i t + \phi_i) - \sum_{j=1}^N G'(\omega_j) V_j \cos(\omega_j t + \phi_j) + \sum_{j=1}^N B'(\omega_j) V_j \sin(\omega_j t + \phi_j) - p \left(\frac{V_0 + \sum_{j=1}^N V_j \cos(\omega_j t + \phi_j)}{v_{ref}} \right)^q = 0 \tag{11}$$

In the above equation, V_0 , V_{js} and ϕ_{js} are unknown variables and using GA they are computed in such a way that (10) approaches zero, that is:

$$\left\| \left\| \sum_{i=1}^M I_{sc,i} \cos(\omega_i t + \phi_i) - \sum_{j=1}^N G'(\omega_j) V_j \cos(\omega_j t + \phi_j) + \sum_{j=1}^N B'(\omega_j) V_j \sin(\omega_j t + \phi_j) - p \left(\frac{v_0 + \sum_{j=1}^N V_j \cos(\omega_j t + \phi_j)}{v_{ref}} \right)^q \right\| \right\| \rightarrow 0 \tag{12}$$

In dealing with the GA, each unknown variable in (12) encoded into $B-b$ binary code $b_{j_1} b_{j_2} \dots b_{j_B}$ which is called a gene, and the total number of genes are $(2N+1)B$ as:

$$chromosome = b_{0_1} b_{0_2} \dots b_{0_B} \dots b_{N_1} b_{N_2} \dots b_{N_B} \tag{13}$$

The relation between V_j and ϕ_j and their $B-b$ genes will be characterized as:

$$V_j = V_{j_{\min}} + \frac{V_{j_{\max}} - V_{j_{\min}}}{2^B - 1} \sum_{k=1}^B b_{jk} \cdot 2^{B-k}, \quad j = 0, 1, 2, \dots, N \quad (14)$$

$$\phi_j = \phi_{j_{\min}} + \frac{\phi_{j_{\max}} - \phi_{j_{\min}}}{2^B - 1} \sum_{k=1}^B b_{jk} \cdot 2^{B-k}, \quad j = 0, 1, 2, \dots, N \quad (15)$$

Where $V_{j(\min),(\max)}$ and $\phi_{j(\min),(\max)}$ are the minimum and maximum range bounds corresponding to the V_j and ϕ_j respectively. Each chromosome of (12) has an associate cost function from (12).

In the next section the achieved formulation above is applied to an overhead line terminated to grounded arrester and the role of the proposed method (MoF-GA) in evaluation of the transient voltage is investigated.

III. TRANSIENT ANALYSIS OF OVERHEAD LINE TERMINATED TO GRID-GROUNDED ARRESTER

In this section, an overhead line of length $L = 600m$ and radius $a = 2.7Cm$ at different heights from earth $h = 10,25m$ is investigated. The grid-grounding system is an equally spaced as $20m \times 20m$ square, and in depth of $1m$ and buried in an earth of electrical parameters of $\epsilon_r = 10$ and $\sigma = 0.01S/m$.

Without losing generality, for the arrester, $p = 1$, $q = 2$ and $v_{ref} = 10kV$ are chosen as well. The $i-v$ characteristic of the arrester is shown in figure 5. The cost function of (12) in the interval of $[1 - 30] \mu s$ with $\Delta t = 0.1 \mu s$ is minimized by GA. Figure 6 and 7 show the mean square error (MSE) by the GA for $h = 10,25m$ respectively.

As it is seen, the MSE is quickly approaching zero (after 20 generation). To observe well the value of the MSE after 20 generation, it is shown inside figure 6 for generation greater than 90.

Finally after converging the MSE, V_j 's and ϕ_j 's are found and transient voltage across the arrester is accordingly evaluated.

To verify the lightning-induced voltage by the GA, it is compared with the one in EMTP. Hence the equivalent circuit of the grid-grounding system should be first extracted by VF [13] and then imported into EMTP.

With reference to [13], the VF is basically a kind of curve fitting through which frequency response is approximated by rational functions, and then these functions are converted to equivalent circuit. For the chosen grid, the input impedance is first computed by MoM and then modeled by the VF. After then the resulted model is converted to equivalent circuit which is shown in figure 8. The achieved equivalent circuit is time domain representation of grid in EMTP.

Finally transient overvoltage by the three approaches, i.e., TLM-GA, MoF-GA, and EMTP for two values of height $h = 10,25m$ is computed and shown in figure 9. Note that in these figures, the hybrid approach TLM-GA means that the overhead line is analyzed by the TLM and the transient voltage by GA whereas in the hybrid approach MoF-GA, the overhead line is analyzed by the MoF.

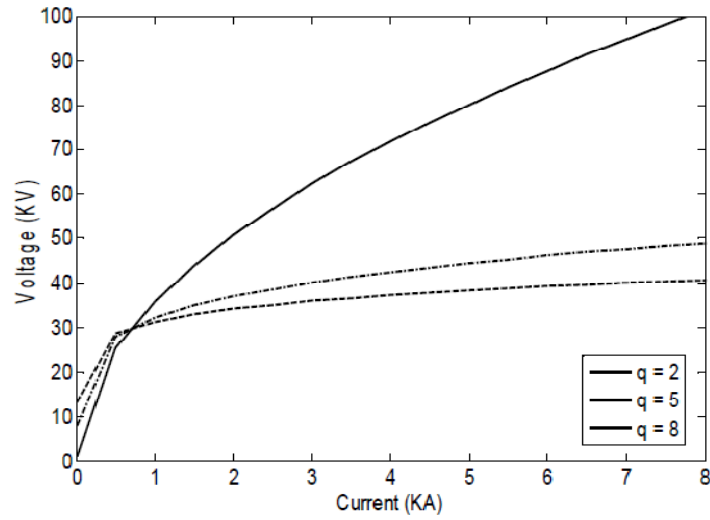


Fig. 5. i-v characteristic of the arrester.

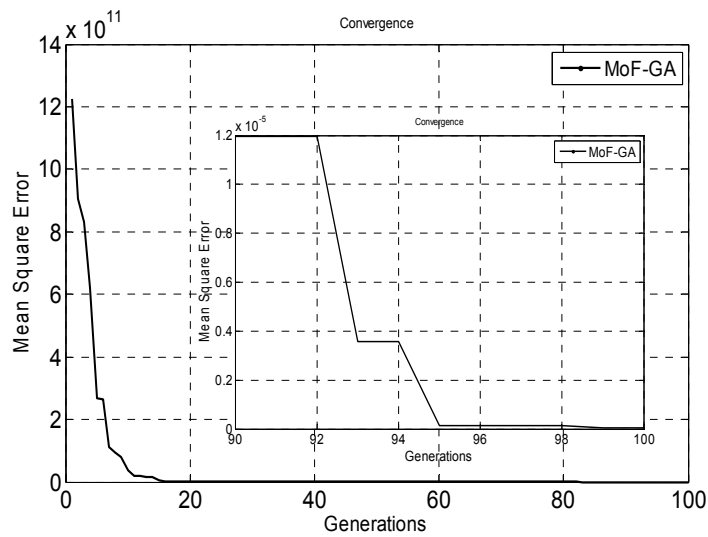


Fig. 6. Mean square error versus generation for h=10m.

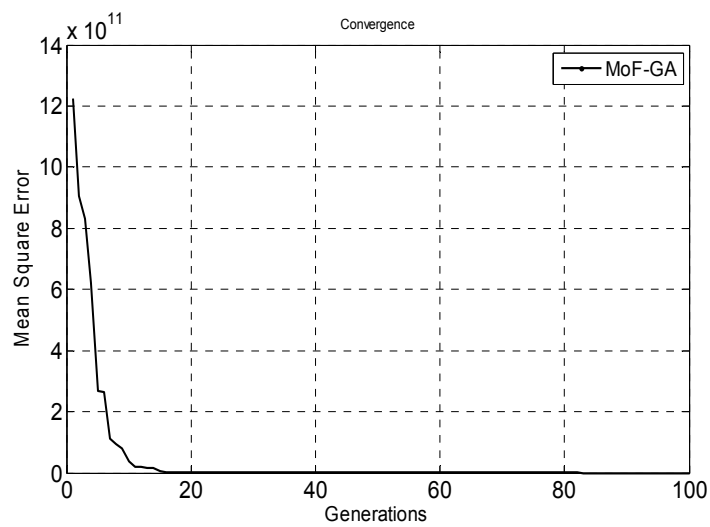


Fig. 7. Mean square error versus generation for h=25m.



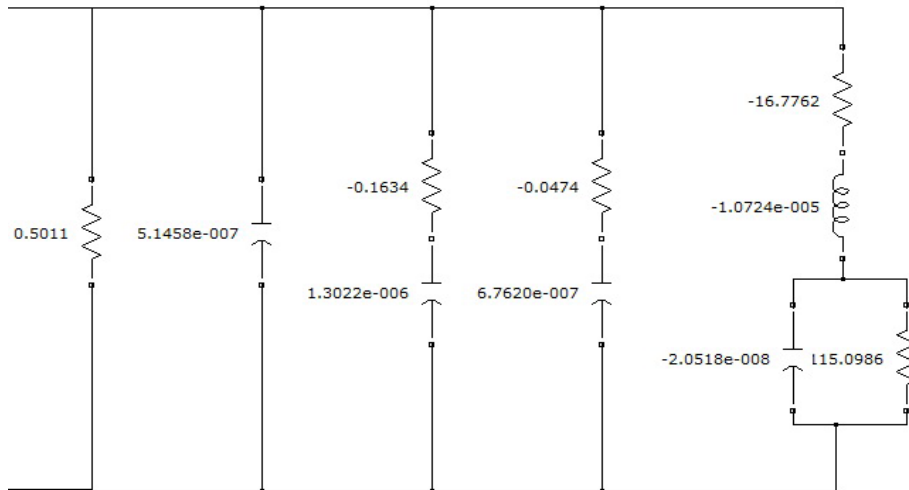


Fig. 8. Equivalent circuit of grid grounding system by VF for conductivity=0.01S/m. Resistors, inductors and capacitances are in Ω , H and F respectively.

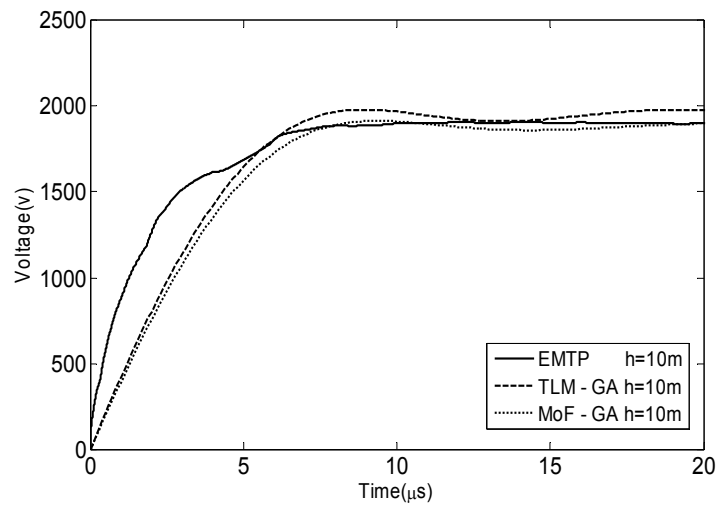

(a)

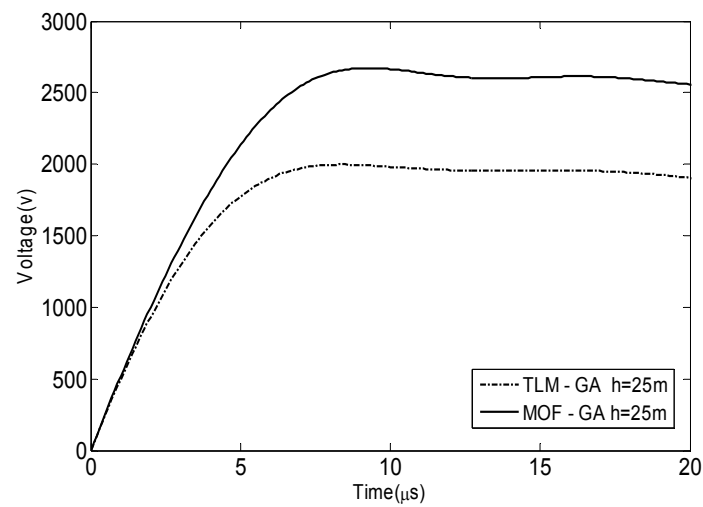

(b)

Fig. 9. Transient voltage across the grid-grounded arrester for (a): $h=10\text{m}$, and (b): $h=25\text{m}$.

As it is seen in figures 9 (a) and (b), when height of the overhead line is increasing, the performance of the TLM is failing since the condition $kh \ll 1$ starts being invalid. This makes the proposed hybrid method (MoF-GA) efficient in computing transient voltage. It is well known that exact computation of this parameter is so important in insulation coordination study of power system and the selection of lightning arresters.

Recent researches [18-21] show that the electrical parameters of soil are frequency dependence. It is evident that considering this effect and the one investigated in this study, effect the transient voltage across arrester simultaneously that similarly should be involved.

IV. CONCLUSION

In this study, frequency domain approach based on genetic algorithm was used for analysis of single overhead line terminated to grid-grounded arrester. In dealing with this problem, the overhead line was first analyzed by the our previous method (MoF) [9], and the transient voltage across the arrester was then computed by GA. Comparison of the hybrid approach with EMTP software and the AOM, the following key findings are achieved:

- I. In despite of EMTP, fast Fourier transforms (FFT) and inverse Fourier transform (IFFT) are not needed.
- II. In despite of AOM, transformation matrix from time domain to frequency domain is not needed, and it is not sensitive to initial guess and gradient operation in the iteration process.
- III. Analysis of the overhead line by the MoF is valid at any frequency where as TLM is restricted to low frequencies.
- IV. Run-time by proposed hybrid model is reduced.

It is evident that there are lots of optimization techniques. The number of generetations of the GA can be more reduced if novel optimizations techniques instead of GA are used.

Analyzing multi-conductor overhead lines terminated to grounded arrester by MoF-GA approach is another study that is in progress.

ACKNOWLEDGMENT

The author would like to express their sincere gratitude to Arak University for its financial supports, and Mr. Kazemi for extracting equivalent circuits.

REFERENCES

- [1] F. Rachidi "A Review of Field-to-transmission line coupling models with special emphasis to lightning-induced voltages on overhead lines" IEEE Trans. on Electromagn. Compat, vol. 54, no. 4, pp. 898–911, August 2012.
- [2] Leonid Grcev, "Modeling of grounding electrodes under lightning currents, IEEE Trans. on Electromagn. Compat, vol. 51, no. 3, pp. 559-571, August 2009.

- [3] Thottappillil, et al, "An improved transmission-line model of grounding system," IEEE Trans. on Electromagn. Compat, vol. 43, no. 3, pp. 348-355, August 2001.
- [4] Leonid Grcev, and Marjan Popov, "On high-frequency circuit equivalents of a vertical ground rod," IEEE Trans. on Power Del, vol. 20, no. 2, pp. 1598-1603, April 2005.
- [5] B. Nekhoul et al, "Calculation of the Impedance of Grounding System", IEEE Trans. on Magnet. vol. 32, no. 3, pp. 1509-1512, May 1996.
- [6] S. Visacro, "A Comprehensive approach to the grounding response to lightning currents," IEEE Trans. on Power Delivery, vol. 22, no. 1, pp. 381-386, January 2007.
- [7] M. I. Lorentzu, et al, "Time domain analysis of grounding electrodes impulse response," IEEE Trans. Power. Del., vol. 18, no. 12, pp. 517-524, April 2003.
- [8] K. Sheshyekani, S.H. Hesamedin Sadeghi, R. Moini, F.Rachidi, M. Paolone," Analysis of transmission lines with arrester termination, considering the frequency-dependence of grounding systems" IEEE Trans. on Electromagn. Compat, vol. 51, no. 4, pp. 986-994, November 2009.
- [9] S. M. Taghavi, S. R. Ostadzadeh, "High frequency analysis of single overhead line terminated to grounding arrester using fuzzy inference models", Journal of Communication Engineering, vol. 2, no. 3, pp: 208-221, Summer, 2013.
- [10] Z. Samiee, and S. R. Ostadzadeh, "Transient analyses of grounding systems subjected by lightning surge currents through fuzzy-based models of input impedance in the frequency domain", Asian Journal of Fuzzy and Applied Mathematics, no. 3, vol. 1, pp: 22-34, January 2015.
- [11] J. Mahseredjian, S. Denneriere, L. Dube, B. Khodabakhchian, and L. Gerin-Lajoie, "On a new approach for the simulation of transients in power systems," Elect. Power Syst. Res., vol. 77, no. 11, pp. 1514–1514, September 2007.
- [12] R.F. Harrington, Field computation by moment methods, Macmillan, New York, 1968.
- [13] M. Kazemi, S. R. Ostadzadeh, "Vector fitting based-models of vertical and horizontal electrodes under lightning strikes to Interface with EMTP," Asian Journal of Fuzzy and Applied Mathematics, no. 3, vol. 1, pp: 11-21, January 2015.
- [14] R. L. Haupt, "An introduction to genetic algorithms for electromagnetics," IEEE Antennas on Propagat. Mag., no. 4, vol. 37, pp. 7–15, 1995.
- [15] J. M. Johnson and Y. Rahmat-Samii, "Genetic algorithms in engineering electromagnetics," IEEE Antennas Propagat. Mag., vol. 39, pp. 7–21, 1997.
- [16] D. S. Weile and E. Michielssen, "Genetic algorithm optimization applied to electromagnetics: a review," IEEE Trans. on Antennas & Propagat., vol. 45, no. 4, pp. 343–353, February 1997.
- [17] S.A. Mass, Nonlinear microwave circuits, Artech House, Norwood, MA, 2003.
- [18] Akbari, M.; Sheshyekani, K.; Alemi, M.R. "The effect of frequency dependence of soil electrical parameters on the lightning performance of grounding systems", IEEE Trans. on Electro Mag. Compat, pp. 739 – 746, vol. 55, no. 4, August. 2013.
- [19] Damir Cavka et al, "A comparison of frequency-dependent soil models: Application of analysis of grounding systems", IEEE Trans. on Electro Mag. Compat., Early view.
- [20] Rafael Alipio , "Modeling of frequency dependence of electrical parameters of soil", IEEE Trans. on Electro Mag. Compat., Early view.
- [21] Mohamed Nayel, "Investigation of Ground frequency characteristics", Journal of Electromagnetic and Application, vol. 5, no. 5, pp. 322-327, August 2013.